

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 2003-060525

(43)Date of publication of application : 28.02.2003

(51)Int.Cl.

H04B 1/40

H04B 1/26

H04J 11/00

(21)Application number : 2001-280712

(71)Applicant : SATO TAKURO

(22)Date of filing : 14.08.2001


(72)Inventor : KOMATSU NORIAKI
TOKUYAMA KATSUMI
SATO TAKURO

(54) COMMUNICATION MACHINE CONFIGURATION HAVING LOW INTERMEDIATE FREQUENCY (LowIF) FUNCTION

(57)Abstract:

PROBLEM TO BE SOLVED: To overcome the problem wherein a transmission station generation oscillator and a reception station generation oscillator used for a transmitter require different oscillators by different oscillation frequencies in a communication apparatus using a Low IF system for a communication system in a communication apparatus having an OFDM modulation/demodulation function, and each local oscillation oscillator needs to be shielded to reduce the interference noise of each oscillator to be generated.

SOLUTION: The configuration of transmission and reception local oscillators is shared by using a transmission signal that is modulated by a Low IF frequency in advance and using an image rejection configuration as the configuration of the modulator of a transmitter.

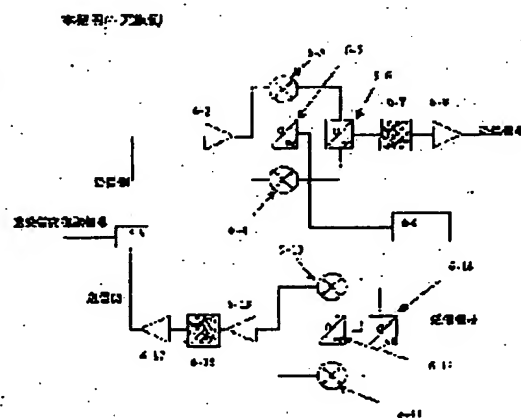

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's
decision of rejection]

[Date of extinction of right]